


# Perfecto® 8/8/1.2 Panel

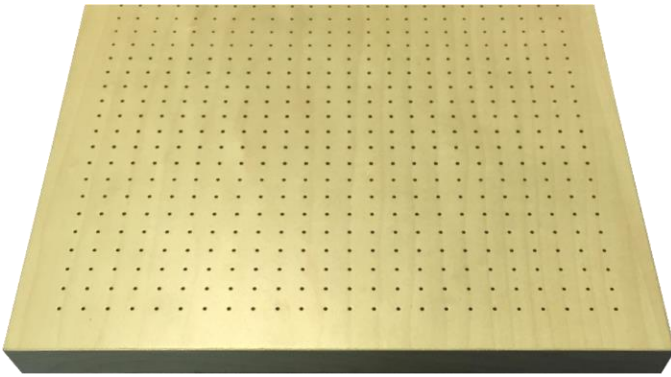

## PRODUCT OVERVIEW

**Perfecto® 8/8/1.2 Panel** is a simple union between architecture and acoustical performance. Utilizing hundreds of 1.2mm perforations in a high recycled content, ULEF, Class A fire rated and FSC certified wood panel, the **Perfecto® 8/8/1.2** focuses the sound absorption spectrum in the mid and low frequencies while maintaining higher frequencies with a low open area.

## SIZING


Standard Panel Dimensions: 8' length x 4' width  
(alternate lengths and widths are available)  
Thickness: 3/4"

## LEED CREDITS

MRC4, MRC5, MRC7  
EQc4.2, EQc4.4,  
Schools EQp3, Schools EQc9

## FIRE RATING

Class A per ASTM E-84

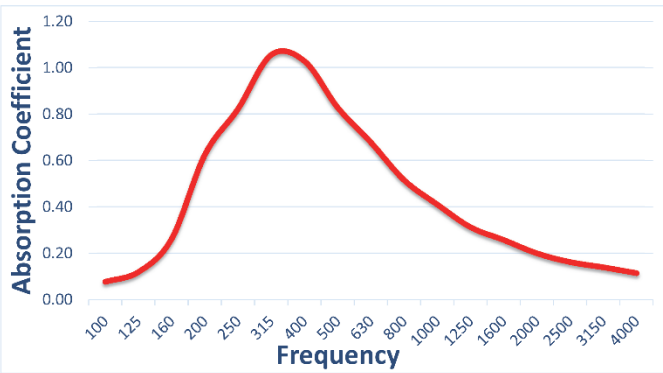

The sound absorption chart above represents the average expected Perfecto® 8/8/1.2 Absorptive Wood Panel or Plank acoustical performance. Several factors play into the exact performance, such as the cavity depth and contents of the cavity. Precise data for project requirements can be provided upon request.


## FINISH

The **Perfecto® 8/8/1.2 Panel** system comes in a wide variety of finishes, including natural wood veneer, laminate and painted surfaces.

## INSTALLATION

Mounting options include wall panel systems with a variety of cavity depths starting at 1-3/4" total system depth (acoustical data at left), as well as options for T-Bar compatibility.

Frequency	8/8/1.2 AVG
100	0.08
125	0.12
160	0.26
200	0.63
250	0.82
315	1.06
400	1.03
500	0.83
630	0.68
800	0.52
1000	0.41
1250	0.31
1600	0.26
2000	0.20
2500	0.16
3150	0.14
4000	0.12
5000	0.12
<b>NRC</b>	<b>0.60</b>

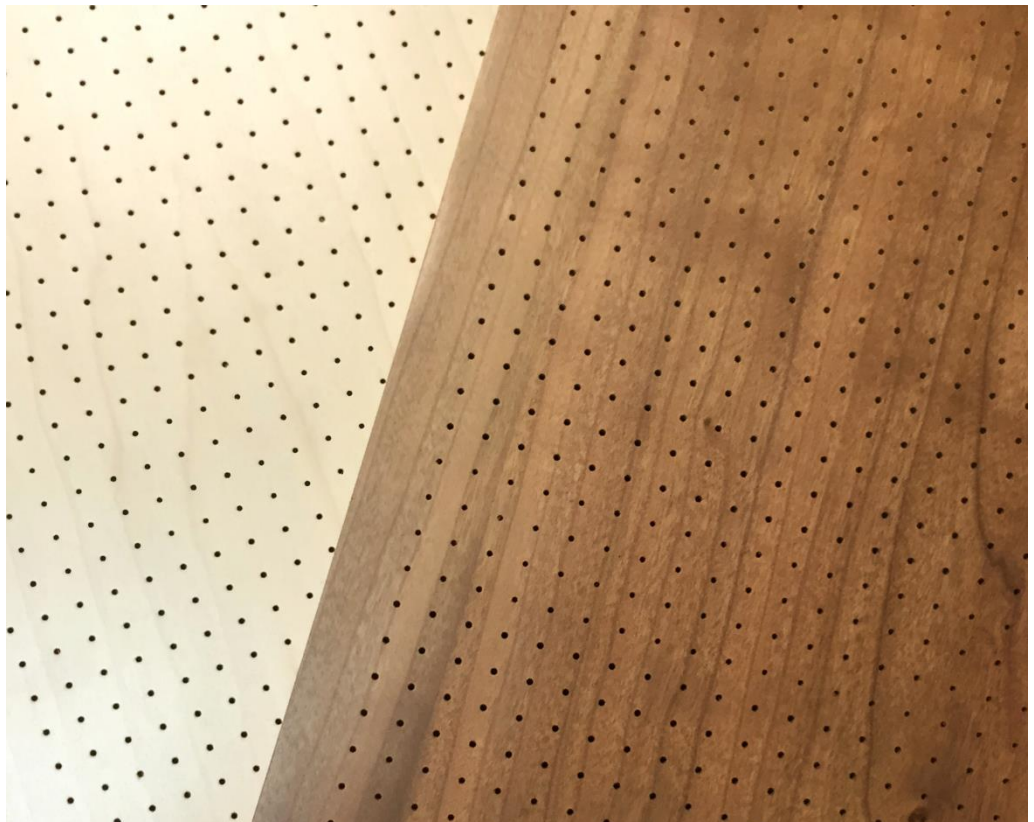

Absorption

Walls & Ceilings