
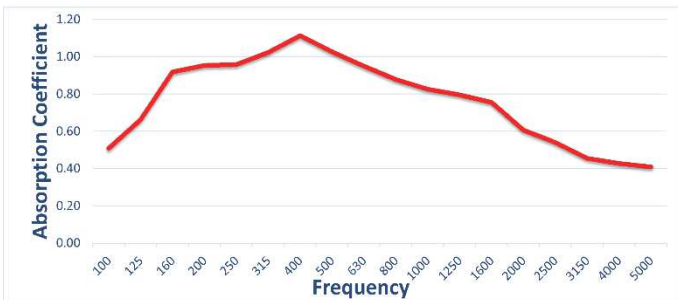


Perfecto® Micro Panel

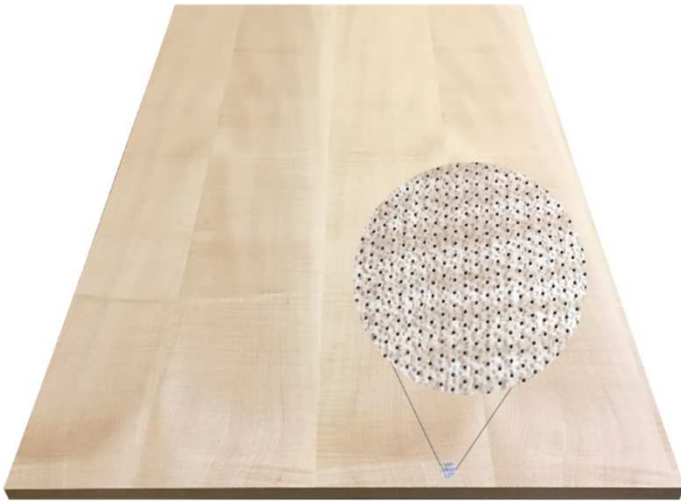

The sound absorption chart above represents the Perfect® Micro Panel wall or ceiling mounted on 2" wood firrings with 2" 6lb/ft³ fiberglass board installed between each furring. Other data can be provided upon request.

PRODUCT OVERVIEW

Perfecto® Micro Panel is one of the most powerful unions between architecture and acoustical performance. Utilizing hundreds of thousands of 0.5mm micro perforations in a high recycled content, ULEF, Class A fire rated and FSC certified wood panel, **Perfecto® Micro** achieves up to an **NRC=0.90** while maintaining the ambiance of the space with reflections at the highest frequencies.

SIZING

Standard Panel Dimensions: 8' length x 4' width
(alternate lengths and widths are available)
Thickness: 3/4"

LEED CREDITS

MRc4, MRc5, MRc7
EQc4.2, EQc4.4,
Schools EQp3, Schools EQc9

CORE FIRE RATING

Class A per ASTM E-84



FINISH

The **Perfecto® Micro Panel** system comes in a wide variety of finishes, including natural wood veneer, laminate and painted surfaces.

INSTALLATION

Mounting options include wall panel systems with a variety of cavity depths starting at 1-3/4" total system depth (acoustical data at left), as well as options for T-Bar compatibility.

Frequency	w/ 2", 6lb/ft ³ Fiberglass
100	0.51
125	0.66
160	0.92
200	0.95
250	0.96
315	1.02
400	1.11
500	1.03
630	0.95
800	0.88
1000	0.83
1250	0.80
1600	0.76
2000	0.61
2500	0.54
3150	0.46
4000	0.43
5000	0.41
NRC	0.90



Absorption

Walls & Ceilings