


Dado™ 5/3 Panel

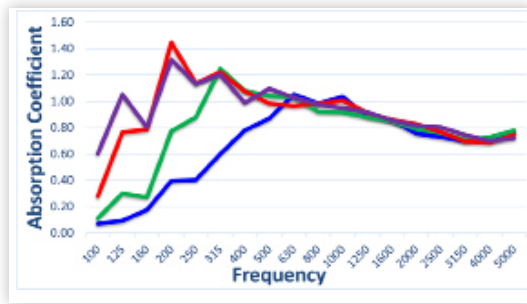

- Blue = 1" 6lb/ft³ fiberglass board
- Green = 2" 6lb/ft³ fiberglass board
- Red = 3" 6lb/ft³ fiberglass board
- Purple = 4" 6lb/ft³ fiberglass board

Additional test data is available – please see the Supplementary Acoustical Data Charts online or contact your local RPG Sales Representative.

Frequency (Hz)	W/4" 6lb/ft ³ Fiberglass Insul.
100	0.60
125	1.05
160	0.80
200	1.32
250	1.13
315	1.20
400	0.99
500	1.10
630	1.03
800	0.98
1000	0.95
1250	0.92
1600	0.86
2000	0.81
2500	0.80
3150	0.74
4000	0.70
5000	0.72
NRC	1.00
SAA	0.94

PRODUCT OVERVIEW

The **Dado™ 5/3 Panel** is a powerful union between architecture and acoustic performance. Utilizing 3mm face-grooves and available in a high recycled content, ULEF, Class A fire rated, and FSC certified MDF core with an optional acoustic backer, the **Dado™ 5/3 Panel** can achieve an **NRC=1.00** while maintaining the space's ambiance with reflections at the highest frequencies.

SIZING

- Standard Panel: 4' W x 8' L x 3/4" T
- Maximum Panel: 5' W x 12' L x 3/4" T
(Custom panel widths and lengths are available)
- Grooves: 3mm wide with 5mm non-perforated bands between (grooves at 8mm OC)
- Planks with T & G long edges can be provided in lieu of panels. Plank widths, typically between 3"-12", to be finalized during the submittals process.
- Each panel weighs approx. 2.50 lbs/ft²

CORE FIRE RATING

Class A (per ASTM E-84)

FINISH

The **Dado™ 5/3 Panel** is available in various finishes, including natural and engineered wood veneers and laminates. RPG offers clear lacquer or factory color-matching on wood finishes and paint colors.

INSTALLATION

Mounting options for the **Dado™ 5/3 Panel** include wall systems (Z-clips, direct screw attached) either surface-mounted or with a variety of cavity depths starting at 1-3/4" total system depth, and ceilings systems with options (Torsion Springs for downward access, RPG C-clips for lift and shift access, direct screw attached) for standard 15/16" HD T-grid supplied by others.