

Perfecto® Plain Flat Panel




REFLECTIVE

WALLS & CEILINGS



The **Perfecto® Plain Flat Panel** does not inherently offer any measurable sound absorption. Different mounting configurations may or may not provide some sound absorption.

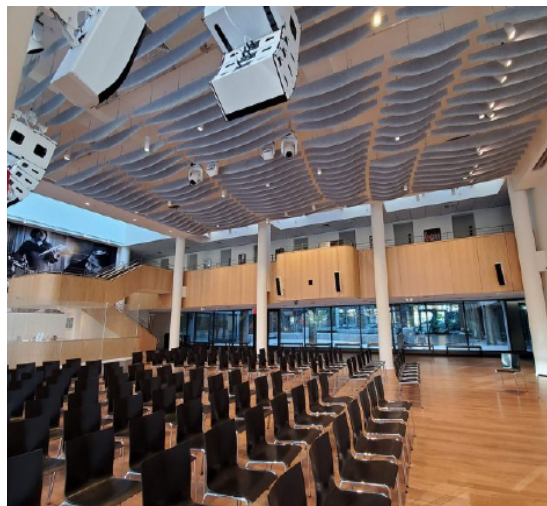

Harlem School of the Arts - Renaissance Project
WSDG, New York

PRODUCT OVERVIEW

The **Perfecto® Plain Flat Panel** is a solid, non-perforated panel and can have a Class A fire-rated high recycled content, ULEF and FSC-certified MDF core. Use alone as a simple, economical wood finish or integrated with RPG's **Perfecto®**, **Dado™** and **Expo™** absorptive wood panel lines in areas of the design that would be better served by a sound reflective surface with the same finish.

SIZING

- Standard Panel: 4' W x 8' L x 3/4" T
- Maximum Panel: 5' W x 12' L x 3/4" T
(Custom panel widths and lengths are available)
- Planks with T & G long edges can be provided in lieu of panels. Plank widths to be finalized during the submittals process.
- Each panel weighs approx. 3.00 lbs/ft²

CORE FIRE RATING

Class A (per ASTM E-84)

FINISH

The **Perfecto® Plain Flat Panel** is available in natural and engineered wood veneers and laminates with clear lacquer or factory color-matching of wood finishes and paint colors. Standard species include Alder, Anigre, Ash, Birch, Cherry, Mahogany, Maple, Poplar, Red Oak, Walnut and White Oak. Custom species may be available on request.

INSTALLATION

Mounting options for the **Perfecto® Plain Flat Panel** include surface-mounted wall systems (Z-clips, direct screw attached) and ceilings systems with options (Torsion Springs for downward access, RPG C-clips for lift and shift access, direct screw attached) for standard 15/16" HD T-grid supplied by others.

