


Absorbor™ RE Panel



ABSORPTION

WALLS & CEILINGS

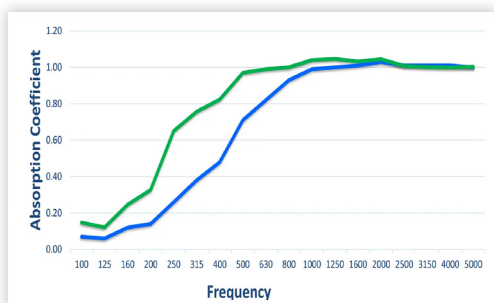

Blue = 1" Absorbor™ RE Panel = NRC 0.75, SAA 0.73
Green = 2" Absorbor™ RE Panel = NRC 0.95, SAA 0.89

Additional test data may be available - if Supplementary data is not, please contact your local RPG Sales Representative.

Frequency (Hz)	2" 6lb/ft³ [PRED]
100	0.15
125	0.12
160	0.25
200	0.33
250	0.65
315	0.76
400	0.82
500	0.97
630	0.99
800	1.00
1000	1.04
1250	1.05
1600	1.03
2000	1.04
2500	1.01
3150	1.00
4000	1.00
5000	1.00
NRC	0.95
SAA	0.89

PRODUCT OVERVIEW

The **Absorbor™ RE Panel** is a high-performance 6 lbs/ft³ rigid polyester acoustical board with square edges. With minimally 60% recycled content, the **Absorbor™ RE Panel** offers economy and performance, yielding an NRC of up to 1.00.

SIZING

- Maximum Panel: 4' W x 8' L x 1" or 2" T
(Custom rectangular panel widths and lengths are available)
- 1" thick panel weighs approx. 0.65 lbs/ft². Contact your local RPG Sale Representative for more information.

FIRE RATING

All Class A Components (per ASTM E-84)

FINISH

The **Absorbor™ RE Panel** is currently available in white.

INSTALLATION

The **Absorbor™ RE Panel** can be mounted to walls with Z-bar attachments or can be configured to be installed in standard 15/16" T-grid supplied by others.

