


Perfecto® 16/16/8 Panel

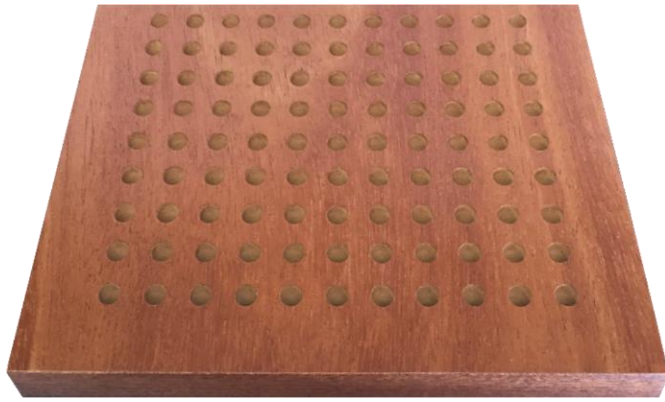

PRODUCT OVERVIEW

Perfecto® 16/16/8 Panel is a simple union between architecture and acoustical performance. Utilizing large perforations in a high recycled content, ULEF, Class A fire rated and FSC certified wood panel, the **Perfecto® 16/16/8** focuses the sound absorption spectrum in the mid range frequencies while maintaining some of the higher frequencies.

SIZING


Standard Panel Dimensions: 8' length x 4' width
(alternate lengths and widths are available)
Thickness: 3/4"

LEED CREDITS

MRC4, MRC5, MRC7
EQc4.2, EQc4.4,
Schools EQp3, Schools EQc9

CORE FIRE RATING

Class A per ASTM E-84

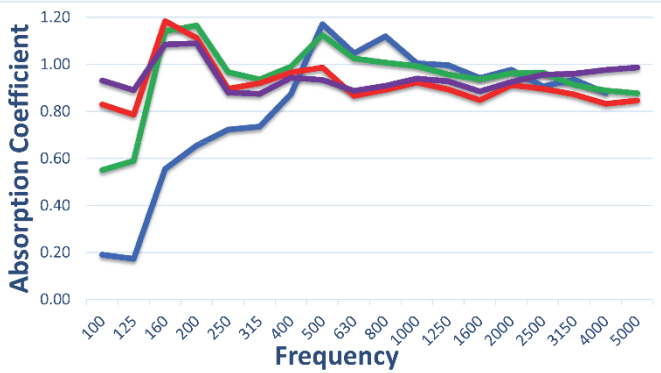

MADE IN



U. S. A.

FINISH


The **Perfecto® 16/16/8 Panel** system comes in a wide variety of finishes, including natural wood veneer, laminate and painted surfaces.

INSTALLATION

Mounting options include wall panel systems with a variety of cavity depths starting at 1-3/4" total system depth (acoustical data at left), as well as options for T-Bar compatibility.

Blue = Perfecto® 16/16/8 Panel + 1" 6pcf fiberglass board = NRC 0.95
 Green = Perfecto® 16/16/8 Panel + 2" 6pcf fiberglass board = NRC 1.00
 Red = Perfecto® 16/16/8 Panel + 3" 6pcf fiberglass board = NRC 0.95
 Purple = Perfecto® 16/16/8 Panel + 4" 6pcf fiberglass board = NRC 0.95

Frequency	Perfecto 16/16/8 + 2" 6pcf Fiberglass
100	0.55
125	0.59
160	1.14
200	1.17
250	0.97
315	0.94
400	0.99
500	1.12
630	1.03
800	1.01
1000	0.99
1250	0.96
1600	0.94
2000	0.96
2500	0.97
3150	0.91
4000	0.89
5000	0.88
NRC	1.00

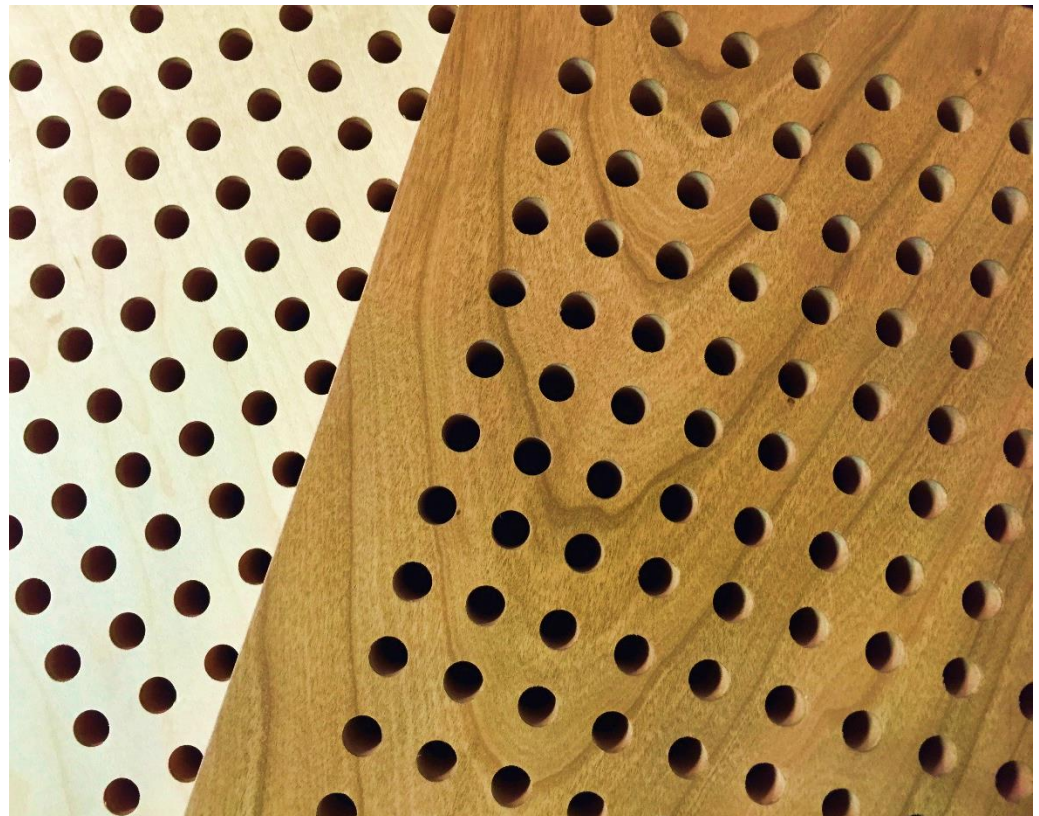

Absorption

Walls & Ceilings