





Perfecto® Micro Panel (Diagonal)

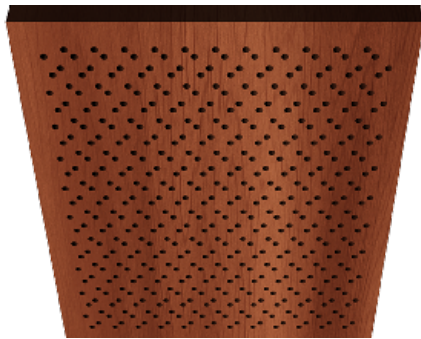

Perfecto® Matrix Panel (Standard)

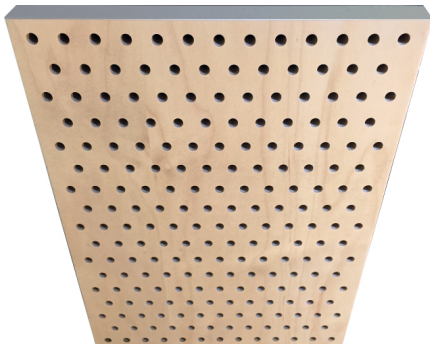

Perfecto® 16/16/5 Plank (Diagonal)

PRODUCT OVERVIEW

The **Perfecto® Panels Family** is a simple but powerful union between architecture and acoustic performance. They utilize round perforations from 1mm to 12mm diameters. Available in a high recycled content, ULEF, Class A fire-rated, and FSC certified MDF core with an optional black fleece backer, the **Perfecto® Panels Family** can achieve up to an **NRC=1.00**. At the same time, focusing the sound absorption spectrum in the mid-range frequencies and maintaining the higher frequencies.

SIZING

- Standard Panel: 4' W x 8' L x 3/4" T
- Maximum Panel: 5' W x 12' L x 3/4" T (Custom panel widths and lengths are available)
- Standard Perforation Options: Micro, Mini, Diamond, Matrix, 16/16/5s & 16/16/8 (Not all profiles shown)
An 16/16/8 panel=8mm diameter holes at 16mm OC horizontally and vertically. Contact your RPG Sales Representative for additional perforation size and spacing options.
- Perforations are available in straight, diagonal or staggered alignment.
- For a continuous installation, **Perfecto® Planks** with T & G long edges can be provided in lieu of panels. Plank widths, typically between 3"-12", to be finalized during the submittals process.
- Each panel weighs approx. 2.50 lbs/ft²

CORE FIRE RATING

Class A (per ASTM E-84)

FINISH

The **Perfecto® Panels Family** is available in various finishes, including natural and engineered wood veneers and laminates. RPG offers clear lacquer or factory color-matching of wood finishes and paint colors.

Black MDF core is available for panels with larger perforations.

INSTALLATION

Mounting options for the **Perfecto® Panels Family** include wall systems (Z-clips, direct screw attached) either surface mounted or with a variety of cavity depths starting at 1-3/4" total system depth, and ceilings systems with options (Torsion Springs for downward access, RPG C-clips for lift and shift access, direct screw attached) for standard 15/16" HD T-grid supplied by others.

Note: See individual Perfecto data sheets for additional information.